

**REAL
WOOD**



**200X
1200MM**



**200 X
1200MM**
 **WOODS**

**REAL
WOOD**

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to offer. The collection of 200x1200mm tiles is everything different you were looking for.



find
creativity
from
basics



The finest
woodwork
for the
finest
living.



COLORS



creativity
for your
kitchen &
living

REAL WOOD ASH



REAL WOOD BIANCO



REAL WOOD NATURAL



REAL WOOD MAHOGANY



REAL WOOD OLIVE



REAL WOOD PINE



REAL WOOD TEAK





REAL WOOD ASH




PHASE - 1



PHASE - 2

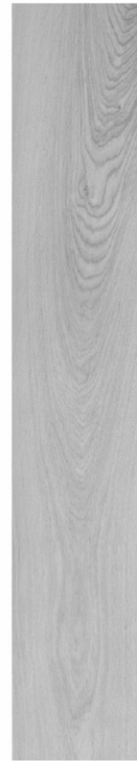

PHASE - 3

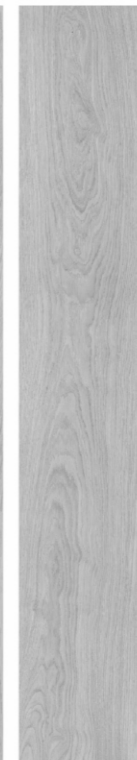

PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9





REAL WOOD ASH



**200X
1200MM**

RANDOM - 15

REAL WOOD BIANCO



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9





REAL WOOD BIANCO



**200X
1200MM**

RANDOM - 15

REAL WOOD NATURAL



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9





REAL WOOD NATURAL



**200X
1200MM**

RANDOM - 15

REAL WOOD MAHOGANY



PHASE - 1 PHASE - 2



PHASE - 3 PHASE - 4

PHASE - 5 PHASE - 6



PHASE - 7 PHASE - 8

PHASE - 9





REAL WOOD MAHOGANY



**200X
1200MM**

RANDOM - 15



REAL WOOD OLIVE



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9





REAL WOOD OLIVE



**200X
1200MM**

RANDOM - 15

REAL WOOD PINE



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4

PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8

PHASE - 9





REAL WOOD PINE



**200X
1200MM**

RANDOM - 15

REAL WOOD TEAK



PHASE - 1



PHASE - 2



PHASE - 3



PHASE - 4



PHASE - 5



PHASE - 6



PHASE - 7



PHASE - 8



PHASE - 9






REAL WOOD TEAK



**200X
1200MM**

RANDOM - 15

LAYING SOLUTIONS

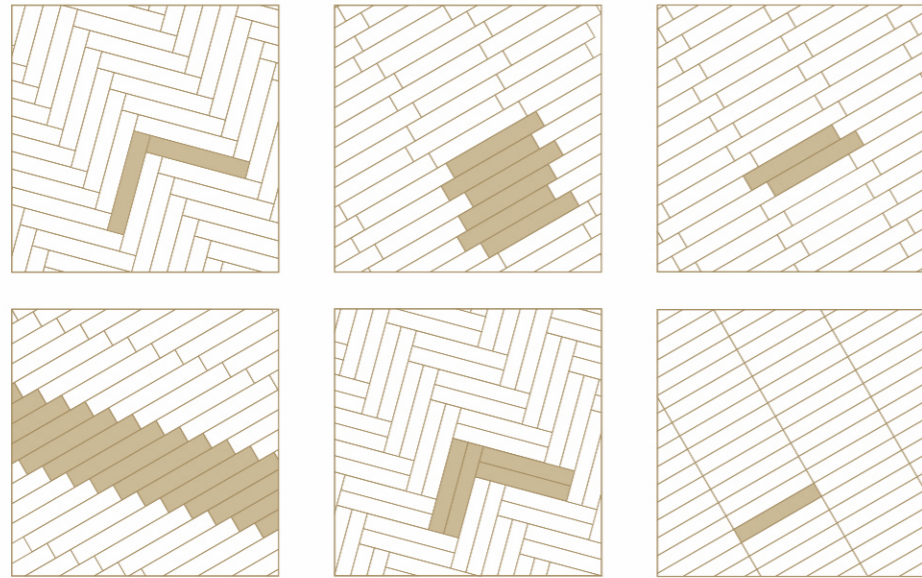


The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.

Porcelain stoneware - Standard EN 14411 (ISO 13006) Annex G Group BIa, E ≤ 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
DIMENSIONS		Length and width	± 0,3%, max 1 mm	In According	
		Thickness	± 5%, max 0,5 mm	In According	
		Wedging	± 0,3%, max 1,5 mm	In According	
		Straightness of the edges	± 0,3%, max 0,8 mm	In According	
		Flatness	± 0,4%, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	ISO 10545-3	≤ 0,5%	In According
		Breaking strength	ISO 10545-4	S ≥ 1300 N	S ≥ 2000 N
		Modulus of rupture		R ≥ 35 N/mm ²	In According
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9 x 10 ⁻⁶ max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9 / R11
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5



INSTALLATION ADVICE

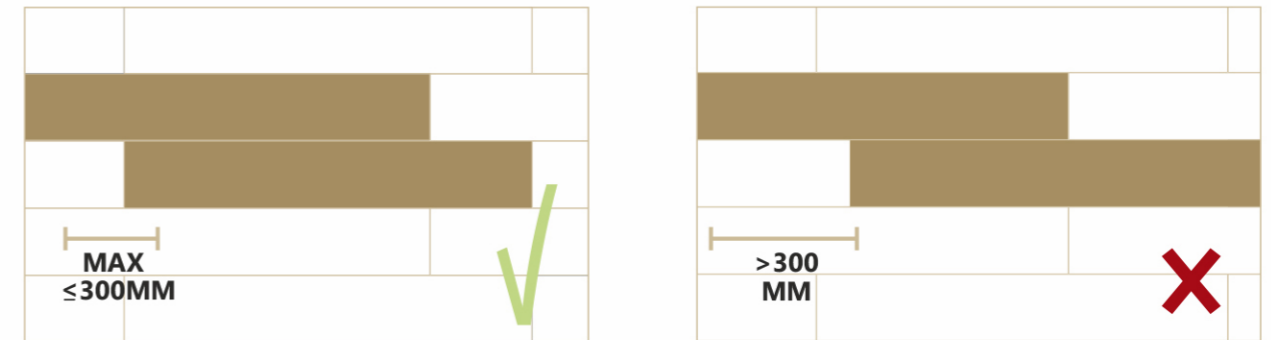

The longest side should be staggered no more than 300mm when laid in running bond.

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES



*We need minimum 2000sq/mtr order for R11 surface

